

## DS-2CD6W45G0-IVS 4 MP IR Network Fisheye Camera



- High quality imaging
- Efficient H.265+ compression technology to save bandwidth and storage
- Clear imaging against strong back light due to 120 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- Water and dust resistant (IP67) and vandal resistant (IK10+)



## ▪ Specification

Camera	
Image Sensor	1/1.8" Progressive Scan CMOS
Max. Resolution	Fisheye view: 3072 × 2048 Panorama view: 2400 × 1800
Min. Illumination	Color: 0.082 Lux @ (F2.4, AGC ON),B/W: 0.016 Lux @ (F2.4, AGC ON),0 Lux with IR
Shutter Time	1 s to 1/100,000 s
Day & Night	IR cut filter
Lens	
Lens Type	Fixed focal lens, 2 mm
Focal Length & FOV	2mm, horizontal FOV 135° (corner mount)
Iris Type	Fixed
Aperture	F2.4
DORI	
DORI	D: 43.2 m (141.7 ft), O: 17.2 m (56.4 ft), R: 8.6 m (28.2 ft), I: 4.3 m (14.1 ft)
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 10 m
Smart Supplement Light	Yes
IR Wavelength	940 nm
Video	
Main Stream	Fisheye view: 50 Hz: 25 fps (3072 × 2048) 60 Hz: 25 fps (3072 × 2048) Panorama view: 50 Hz: 25 fps (2400 × 1800) 60 Hz: 25 fps (2400 × 1800)
Sub-Stream	Fisheye view: 50 Hz: 25 fps (1920 × 1080, 720 × 720, 720 × 480) 60 Hz: 25 fps (1920 × 1080, 720 × 720, 720 × 480) Panorama view: 50 Hz: 25 fps (1920 × 1080, 640 × 480, 640 × 360, 320 × 240) 60 Hz: 25 fps (1920 × 1080, 640 × 480, 640 × 360, 320 × 240)
Third Stream	Fisheye view: 50 Hz: 25 fps (1920 × 1080, 1280 × 720, 704 × 576, 640 × 480) 60 Hz: 25 fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480) Panorama view: 50 Hz: 25 fps (1920 × 1080, 1280 × 720, 704 × 576, 640 × 480) 60 Hz: 25 fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480)
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 16 Mbps
H.264 Type	Baseline Profile,Main Profile,High Profile
H.265 Type	Main Profile

Bit Rate Control	CBR,VBR
Scalable Video Coding (SVC)	H.264 and H.265 encoding
Region of Interest (ROI)	4 fixed region(s) for main stream and sub-stream
<b>Audio</b>	
Audio Type	Mono sound
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM
Audio Bit Rate	64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32-160Kbps(MP2L2)
Audio Sampling Rate	8 kHz/16 kHz
Environment Noise Filtering	Yes
<b>Network</b>	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP
Simultaneous Live View	Up to 20 channels
API	Open Network Video Interface (PROFILE S, PROFILE G), ISAPI
User/Host	Up to 32 users 3 user levels: administrator, operator, and user
Security	Password protection, HTTPS encryption, IEEE 802.1x port-based network access control, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF
Network Storage	Support microSD/SDHC/SDXC card (256 G), local storage and NAS (NFS,SMB/CIFS), ANR
Client	iVMS-4200,iVMS-4500,iVMS-5200,Hik-Connect
Web Browser	IE8+, Chrome31.0-44, Firefox 30.0-51, Safari8.0+
<b>Image</b>	
Image Parameters Switch	Yes
Image Settings	saturation,brightness,contrast,sharpness,AGC,adjustable by client software or web browser,white balance
Day/Night Switch	Day,Night,Auto,Schedule,Alarm Trigger
Wide Dynamic Range (WDR)	120 dB
Image Enhancement	BLC,HLC,3D DNR,defog
Privacy Mask	4 programmable polygon privacy masks
Picture Overlay	LOGO picture can be overlaid on video with 128 × 128 24 bit bmp format.
<b>Interface</b>	
Ethernet Interface	1 RJ45 10 M/100 M/1000 M self-adaptive Ethernet port
On-Board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 256 GB
Built-in Microphone	1 built-in microphone(s)
Audio	1 Audio input (line in, 3.5 mm), 1 audio output (line out, 3.5 mm)
Alarm	1 input, 1 output (max. 24 VDC, 1 A)
RS-485	1 RS-485 (Half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive)
Reset Key	Yes
Indicator	Yes
<b>Event</b>	
Basic Event	Motion detection,video tampering alarm,alarm input and output,network disconnected,IP address conflict,illegal login,HDD full,HDD error
Smart Event	Line crossing detection,intrusion detection,region entrance detection,region exiting detection,unattended baggage detection,object removal detection


General	
Power	12 VDC $\pm$ 20%, 0.9 A, max. 11 W, 2-core terminal block, PoE: 802.3af, Class 0, 36 V to 57 V, 0.3 A to 0.2 A, max. 12 W
Material	Cover: Metal, main body: Metal
Dimension	213.73 mm $\times$ 199.67 mm $\times$ 137.57 mm (8.4" $\times$ 7.86" $\times$ 5.42")
Package Dimension	255 mm $\times$ 255 mm $\times$ 190 mm (10.04" $\times$ 10.04" $\times$ 7.48")
Weight	Approx. 1.338 kg (2.95 lb.)
With Package Weight	Approx. 2.054 kg (4.53 lb.)
Storage Conditions	-40 °C to +60 °C (-40 °F to +140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-40 °C to +60 °C (-40 °F to +140 °F). Humidity 95% or less (non-condensing)
Language	32 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil)
General Function	one-key reset, anti-flicker, Heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
Cable Length	0.15 m (0.49 ft.)
Demist	Yes
Approval	
EMC	FCC: 47 CFR Part 15, Subpart B, CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014, RCM: AS/NZS CISPR 32: 2015, IC: ICES-003: Issue 7, KC: KN32: 2015, KN35: 2015
Safety	UL: UL 62368-1, CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017, BIS: IS 13252 (Part 1): 2010/ IEC 60950-1: 2005, LOA: IEC/EN 60950-1
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP67: IEC 60529-2013, IK10+: IEC 62262:2002
Anti-Corrosion Protection	NEMA 4X (NEMA 250-2018)

### ▪ Available Model


DS-2CD6W45G0-IVS (2 mm)



## Dimension

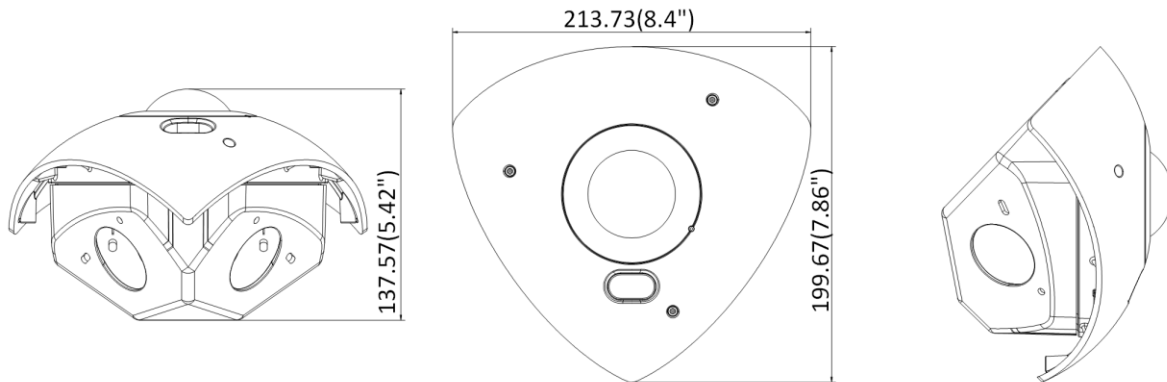

## Screw Hole

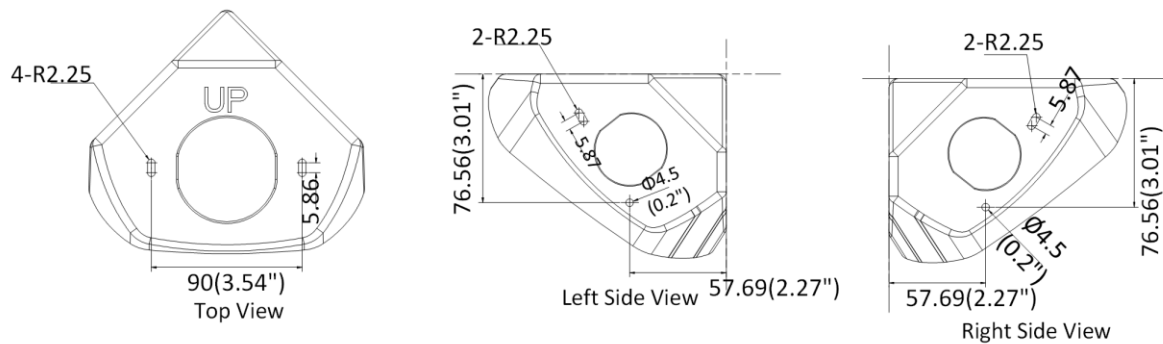

Unit: mm (inch)

Distributed by



# HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com