

## Roller Shutter Contact

Code: *RS002/ALI*


RS002 | Roller Shutter Contact | Grade 2 | Aluminium | Non-resistored



This roller shutter contact can be used in most security systems up to and including grade 2 as specified in EN50131-1:2006+A3:2020 and is compliant with EN50131-2-6:2008 and environmental class III. The contact is potted/sealed to prevent access to the inside of the contact.

### Features & Benefits

- High Quality Alloy Finish
- Double pole
- EN50131-2-6 Grade 2
- Environmental Class III

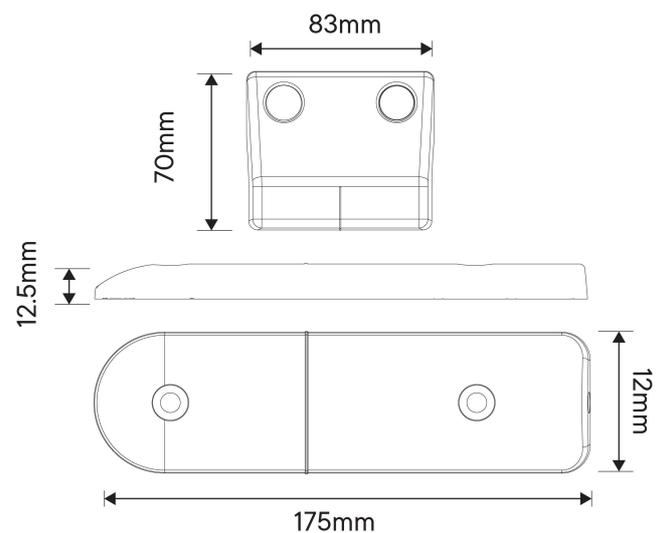

### Product Information

**CQR Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH**  
Sales: +44(0)151 6061000 (9am to 5pm Monday to Friday) Tech: +44(0)151 606 6311  
[sales@cqr.co.uk](mailto:sales@cqr.co.uk) | [www.cqr.co.uk](http://www.cqr.co.uk)

Company Registration Number: 5192024 | VAT Number: 309 0409 27



<b>Security Grade</b>	2
<b>Environmental Class</b>	Class III
<b>Standards</b>	EN50131-1, EN50131-2-6, EN50130-5
<b>Tamper Protection</b>	Internal
<b>Warranty</b>	2
<b>Connection type</b>	Wired

## Housing

<b>Colour</b>	Aluminium
<b>Material</b>	Aluminium

## Electrical

<b>Connection type</b>	Wired
<b>No. of terminals</b>	4 Wire
<b>Contact type</b>	Normally Closed
<b>Contact Material</b>	Ruthenium
<b>Wire length (mm)</b>	450

## Features

<b>Mode of operation</b>	DP
<b>Operation Axes (X, Y, Z)</b>	X, Y
<b>Pull-in gap (X, Y, Z)mm</b>	25, 50
<b>Suitable for Double Door</b>	Yes
<b>No. of terminals</b>	4 Wire

