



Surface Magnetic Contact


Code: SC517/WH/G2

SC517 | Surface Contact | Grade 2 | White | Non-resistored

This compact surface mounted magnetic contact can be used in most security systems up to and including grade 2 as specified in EN50131-1: 2006 and is certified to EN50131-2-6:2008 and environmental class II (for use indoors) by Kiwa FSS. This contact can be used on windows and doors to detect the unauthorised entry of an intruder. The contact is also tamper protected against removal from its mounting surface.

Features & Benefits

- 65 x 13.5 x 13mm
- 4 Terminals
- Selectable Resistors (A, B, D, E, I)
- Microswitch Tamper
- Can be fitted in Normal Double
- Pole Configuration
- Can be used on Double Doors
- Available White or Brown
- Operating Gap - 15mm

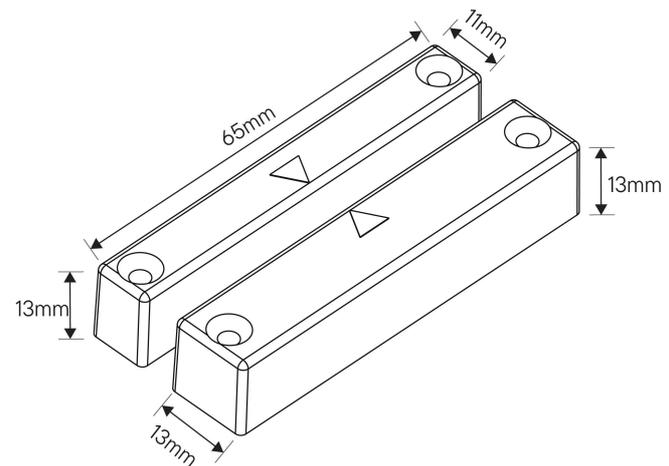

CQR Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH
Sales: +44(0)151 6061000 (9am to 5pm Monday to Friday) Tech: +44(0)151 606 6311
sales@cqr.co.uk | www.cqr.co.uk

Company Registration Number: 5192024 | VAT Number: 309 0409 27



Product Information

Security Grade	2
Environmental Class	Class II
Standards	EN50131-1, EN50131-2-6, EN50130-5
Tamper Protection	RFMS
Warranty	2
Connection type	Wired

Housing

Colour	White
Material	HIPS

Electrical

Connection type	Wired
No. of terminals	5 Terminals
Contact type	Normally Closed
Contact Material	Palladium

Features

Mode of operation	DP
Operation Axes (X, Y, Z)	X, Y, Z
Pull-in gap (X, Y, Z)mm	5, 10, 20
Suitable for Double Door	Yes
No. of terminals	5 Terminals

