



## Surface Magnetic Contact


*Code: SC570/WH/MD/MULTI/G3*

SC570 | Surface Contact | Grade 3 | White | Multi Resistor

This magnetic door contact can be used in most security systems up to and including grade 3 and environmental class II as specified in EN50131-1 and is certified to EN50131-2-6 by Kiwa FSS. This contact can be used on windows and doors to detect the unauthorised entry of an intruder. The contact is also protected against tampering with optional detection of removal from its mounting surface.

### Features & Benefits

- 3 Terminals
- Microswitch wall tamper
- Selectable end of line resistor
- Available in white or brown
- Magnetic Detection
- EN50131-2-6 Grade 3
- Environmental Class II

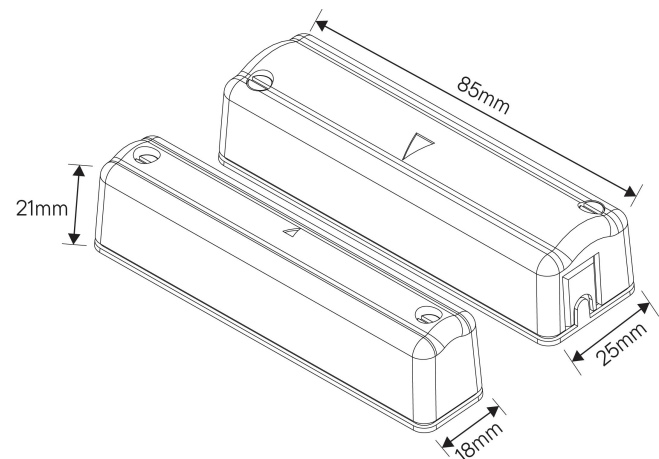

### Product Information

**CQR Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH**

**Sales:** +44(0)151 6061000 (9am to 5pm Monday to Friday) **Tech:** +44(0)151 606 6311

[sales@cqr.co.uk](mailto:sales@cqr.co.uk) | [www.cqr.co.uk](http://www.cqr.co.uk)

Company Registration Number: 5192024 | VAT Number: 309 0409 27



<b>Security Grade</b>	3
<b>Environmental Class</b>	Class II
<b>Standards</b>	EN50131-1, EN50131-2-6, EN50130-5
<b>Tamper Protection</b>	Cover RFMS & MID
<b>Warranty</b>	2
<b>Connection type</b>	Wired

## Housing

<b>Colour</b>	White
<b>Material</b>	HIPS

## Electrical

<b>Connection type</b>	Wired
<b>No. of terminals</b>	3 Terminal
<b>Contact type</b>	Normally Closed
<b>Contact Material</b>	Rhodium & Ruthenium

## Features

<b>Mode of operation</b>	EOL/ FSL
<b>Resistor Type</b>	A, B, D, E, F, H & I
<b>Operation Axes (X, Y, Z)</b>	X, Y
<b>Pull-in gap (X, Y, Z)mm</b>	12, 10
<b>Suitable for Double Door</b>	Yes
<b>No. of terminals</b>	3 Terminal

