



Surface Magnetic Contact


Code: SC555/AL/4CX

SC555 | Surface Contact | Grade 2 | Aluminium | Non-resistored

This surface mounted magnet contact can be used in security systems up to and including grade 2 and environmental class II as specified in EN50131-1 and is compliant with EN50131-2-6. It operates as a normally closed circuit going open when the magnet is removed. This contact is not suitable for ferrous surfaces

Features & Benefits

- 4 Core pre-wired
- 15mm operating gap
- EN50131-2-6 Grade 2
- Environmental Class II
- Size 43 x 17 x 19mmn

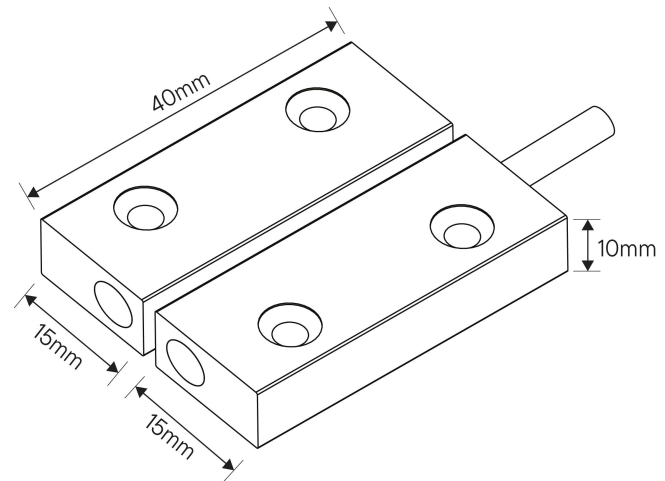

Product Information

Security Grade

2

CQR Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH

Sales: +44(0)151 6061000 (9am to 5pm Monday to Friday) **Tech:** +44(0)151 606 6311

sales@cqr.co.uk | www.cqr.co.uk

Company Registration Number: 5192024 | VAT Number: 309 0409 27



Environmental Class	Class II
Standards	EN50131-1, EN50131-2-6, EN50130-5
Tamper Protection	Internal
Warranty	2
Connection type	Wired

Housing

Colour	Aluminium
Material	Aluminium

Electrical

Connection type	Wired
No. of terminals	4 Wire
Contact type	Normally Closed
Contact Material	Palladium
Wire length (mm)	1000

Features

Mode of operation	DP
Operation Axes (X, Y, Z)	Z, Y
Pull-in gap (X, Y, Z)mm	15, 15
Suitable for Double Door	Yes
No. of terminals	4 Wire

