

**TITLE:**

RG59 Coaxial Cable

**CODE:**

SFX/59-PVC-WHT-100


**DESCRIPTION:**

100m RG59 Coaxial Cca White PVC

**SUPPLIED AS:**

Reel of 100m

- Even with the introduction of IP cameras, coax is still a preferred choice for many installers in the security industry
- Coax is a simple solution that does not require any additional products such as baluns to create an image
- Polyvinyl chloride plastic has excellent aging properties and will usually exceed a 25-30 year service life
- Suitable for general purpose CCTV applications and high frequency signal transmission
- Improved performance and protection against fire
- Can be cut to any length required saving installation time

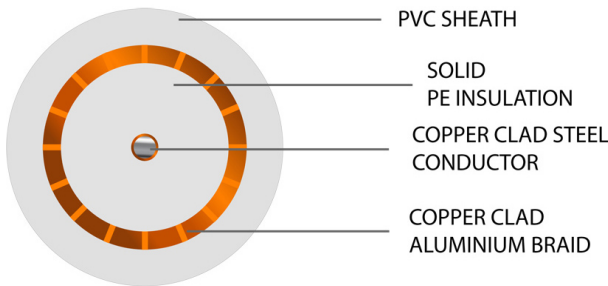

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



## Product Specification



### Cable Construction

Cable Construction	19 Strands
CPR	Eca
Conductor	Copper Clad Steel
Conductor Diameter (mm)	0.58 ±0.008
Inner Conductor	Copper Clad Steel
Overall Diameter (mm)	6.10 ±0.10
Compliance and Standards	CE2014/30/EU, RoHS2 2011/65/EU, LVD 2014/35/EU

### Insulation

Insulation	Solid PE
Insulation Colour	Clear
Insulation Thickness (mm)	1.60 ±0.01

### Outer/Jacket Specification

Jacket	PVC
Overall Colour	White
Overall Diameter (mm)	6.10 ±0.10
Jacket Colour	White RAL 9003
Jacket Thickness (mm)	0.85 ±0.10

### Electrical Characteristics

Max Conductor DC resistance @ 20°C	<216Ω/km
Outer Conductor DC resistance @ 20°C	<480/km
Rated Temperature (°C)	-20°C to 80°C
Impedance	750 ±30
Capacitance	>67nF/km




enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



## MORE INFORMATION:

EURO CLASS (ca: cable)	CLASSIFICATION CRITERIA		CPR GUIDE	Securi-Flex®	
	FIRE RATING	SFX COMMENT			
Reaction to Fire BS EN ISO 1716			SUBCLASSIFICATIONS FOR EUROCLASSES B <sub>ca</sub> to D <sub>ca</sub>		
<b>A<sub>ca</sub></b>	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet A <sub>ca</sub> , so they should only be specified with extreme caution.	<b>(S) SMOKE PRODUCTION</b>	<b>(D) FLAMING DROPLETS</b>	<b>(A) SMOKE ACIDITY</b>
Reaction to Fire BS EN 50399			BS EN 50399/BS EN 61034-2	BS EN 50399	BS EN 60754-2
<b>B1<sub>ca</sub></b>	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1 <sub>ca</sub> .	s1a: s1 + transmittance >=80% (BS EN 61034-2) s1b: s1 + transmittance >=60% <80% (BS EN 61034-2) s1: Low production of slow propagation of smoke s2: Intermediate production & propagation of smoke s3: None of the above	d0: No fall of droplets or flaming particles, times for 1200 seconds d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds d2: None of the above	a1: Very low acidity (conductivity <2.5 μS/mm & pH >4.3) a2: low acidity (conductivity <10 μS/mm & pH >4.3) d2: None of the above
<b>B2<sub>ca</sub></b>	Combustible, low flame spread & heat release contribution to the fire	Similar to Class C <sub>ca</sub> , although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.			
<b>C<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class D <sub>ca</sub> , this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class C <sub>ca</sub> though availability is improving.			
<b>D<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.			
Reaction to Fire BS EN 60332-1-2			<b>Visit us online:</b> <a href="http://www.securiflex.co.uk">www.securiflex.co.uk</a> The Trusted Cable Brand		
<b>E<sub>ca</sub></b>	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2 <sub>ca</sub> to E <sub>ca</sub> . For a cable to meet A <sub>ca</sub> , B1 <sub>ca</sub> , B2 <sub>ca</sub> or C <sub>ca</sub> , there also needs to be regular on-going factory audits.		
<b>F<sub>ca</sub></b>	Combustible, fire spread of more than 425mm	Cables classified to Class F <sub>ca</sub> may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.			

## OUR OPERATING TEMPERATURE RANGE GUIDE

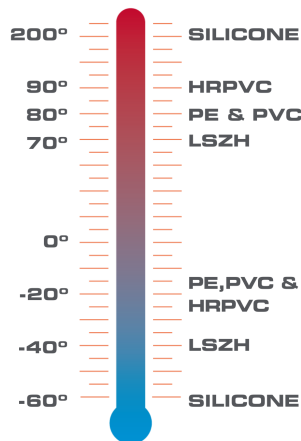

Securi-Flex®



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23