


Honeywell

P026-01-B

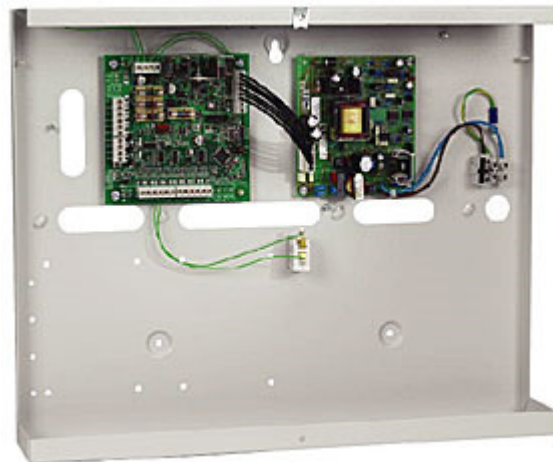

P026-01-B

Intelligent 2.75A power supply monitoring & diagnostics. 8 fully programmable zones and 4 programmable outputs, tamper protection and a rotary switch for setting module address.

| Basic parameters | |
|--|--|
| Manufacturing | power supply + concentrator in metal housing |
| Power supply voltage | 230 V / 50 Hz / 85 VA |
| Max. total consumption from AUX terminals | 1,5 A |
| Max. size of recharging current to the accumulator | 1,25 A |
| Max. capacity of backup ACU | 17Ah / 12V |
| ACU protection against deep discharge | yes, by disconnecting of the battery |
| Number of PGM outputs | 4 |
| PGM output type | transistor SE (optional SC) |
| PGM output load | 400 mA |
| Compatibility | Galaxy |
| Number of zones | 8 |
| Zone ending | DBAL (1k) optional EOL (1k) |
| Indication | yes, LED |
| Environment class | II - general indoor |
| Dimensions | |
| Dimension - height | 352 mm |
| Dimension - width | 440 mm |
| Dimension - depth | 88 mm |