

Technical information

About the unit:

- 15m Curtain PIR detector designed to cover a specific, narrow detection area by creating a protective curtain
- Operating temperature: -10°C to 55°C
- Relative humidity: 0% to 95% non-condensing

Warranty:

- 10 years

Mounting brackets:


- Wall and ceiling
- Pack of 10 brackets (AFU-0004)



Product range comparison:

Model	Part Code	Description	Mounting	EN Grade	Compliance	Pyro	Detection Range	Mounting Height	LED
C15	AKX-0001	15m Curtain PIR	Wall	G2	EN50131-2-2 EN50131-1 PD6662:2017 Grade 2 Class II	Quad	15m x 2m	2.3m	Cyan
C15-W 868MHz	GDG-0001	Wireless 15m Curtain PIR	Wall	G2	EN50131-2-2 EN50131-1 PD6662:2017 Grade 2 Class II	Quad	15m x 2m	2.3m	Tri-Colour
C15-W 866MHz	GDG-0002	Wireless 15m Curtain PIR	Wall	G2	EN50131-2-2 EN50131-1 PD6662:2017 Grade 2 Class II	Quad	15m x 2m	2.3m	Tri-Colour

Detection coverage:

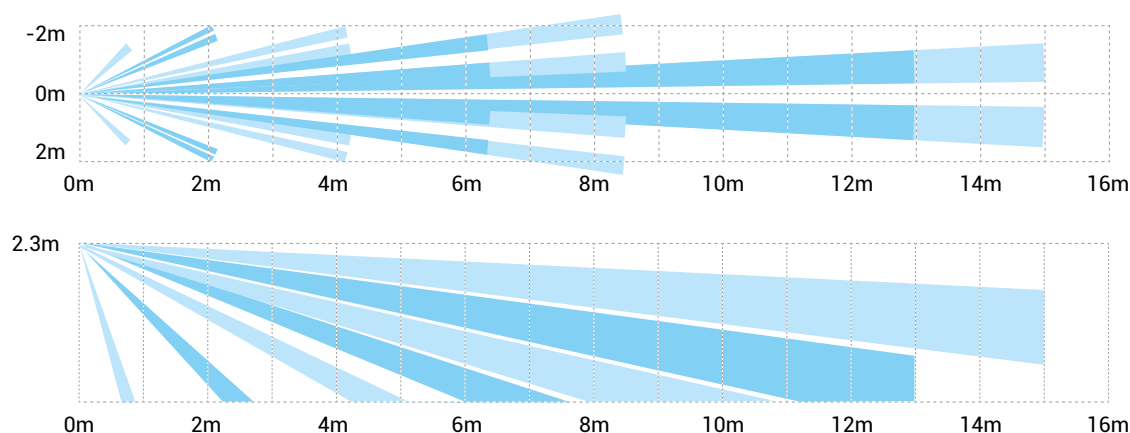

Power specifications	C15	C15-W
Operating Voltage	9 - 15Vdc	3Vdc
Maximum Current	12mA	18mA
Quiescent Current	9.3mA	21uA
Receiver	N/A	Category 1, Class 2
Receiver LBT	N/A	Listen Before Talk
Transmitter Duty Cycle	N/A	<1%
Max RF Power	N/A	10mW
Low Voltage Signal	N/A	2.85V

Dimensions & Weight:

